

## Faro Square 150

### TECHNOLOGY



#### Flow Sense

A built-in protector against power-related issues, ensuring lasting performance and safety.



#### Split & Seal

Uses protective polymers to shield Filix products from water and moisture, boosting durability and resilience.



#### Heat Sense

Automatically reduces LED power at high temperatures, ensuring longevity and safety in Filix products.



#### ASHRAE/IEC 90.1 Compliant

Defines energy efficiency standards for building design, focusing on insulation, HVAC, and sustainable energy use.

#### Qualicoat Seaside Class Powder

##### Coat

Enhanced powder coating for aluminum, specifically formulated for superior durability and optimal performance in marine environments, lasting for over 10 years.



# Faro Square 150

Specification Sheet



**UL STD 1598**  
**IP66/IP67**

## LUMINAIRE FEATURES

### Design and Application

- Facade lighting
- Architectural lighting
- Landscape lighting

### Mechanical details

- IK08
- IP66 / IP67
- 3G vibration rating resistance (ANSI C136.32)
- Material: Die-Cast aluminium body
- Double surface protected with anodised base layer and powder coat top layer in Qualicoat Seaside standard
- Surface Installation
- Supplied with 0,5 m oil and water resistant feed cable

### Electrical details

- LED Lifetime TM-21 @ 85°C  
L90(6K) = 98,500 hours
- Operating temperature -40°C (-40°F) to +50°C (122°F)
- CRI >85
- On site LED module replacement
- On site engine replacement

### Controls

- DMX, Integral or with compatible LED power supply,
- DALI, Integral or with compatible LED power supply,
- 0-10V, Integral or with compatible LED power supply,
- Mains, with compatible LED power supply

### Sustainability

- Recyclable material
- Repairable
- Dark Sky compliant

### Integrated Systems

- Split & Seal
- Heat Sense
- Flow Sense

### Links & Downloads

- [List of available drivers](#)
- [Voltage drop calculator](#)
- [Fixture installation manual](#)
- [CAD files](#)
- [IES-LTD data](#)



# Faro Square 150

## ORDERING INFORMATION

### MODEL

**FS15**

### POWER

**L** • L - 40W, 4000 lm

### COLOR TEMP.

**AM** • AM - Amber

**27** • 27 - 2700K

**30** • 30 - 3000K

**T6** • T6 - Tunable white 2200K-4000K

**M4** • M4 - RGBW (W 3000K)

### OPTICS

**SP** • SP - Narrow Spot (8X8°)

**MS** • MS - Medium Spot (15X15°)

**NF** • NF - Narrow Flood (30x30°)

**MF** • MF - Medium Flood (40x40°)

**W** • W - Wide (60x60°)

**SY** • SY - Spot Elliptical (10°x20°)

**NY** • NY - Narrow Elliptical (10°x40°)

**MY** • MY - Medium Elliptical (10°x60°)

### INPUT OPTIONS

**CC** • CC - Constant current

**24** • 24 - 24VDC

**48** • 48 - 48VDC (Tria Installation Only)

**110** • 110 - 110-277VAC, 60Hz

**230** • 230 - 220-240VAC, 50Hz

### CONTROL

**0** • 0 - ON-OFF operation

**X** • X - DMX Operation

**D** • D - DALI Operation

**V** • V - 0-10V operation

**P** • P - PWM operation (Low voltage only)

### FINISH

**W** • W - RAL9003 Structure (Signal White)

**S** • S - RAL7044 Structure (Silky Grey)

**A** • A - RAL7016 Structure (Antracite Grey)

**B** • B - RAL9005 Structure (Jet Black)

**D** • D - RAL 1015 Structure (Desert Sand)

**G** • G - RAL 6002 Structure (Leaf Green)

### INTERNAL LIGHT CONTROL

**0** • 0 - No internal light control

**1** • 1 - Microlouvre

**2** • 2 - Hex louvre

**3** • 3 - Discrete sight

**4** • 4 - Half moon

**5** • 5 - Honeymoon

### EXTERNAL LIGHT CONTROL

**0** • 0 - No external light control

**1** • 1 - Snoot

### INSTALLATION

#### TYPE

**B** • B - Base

**E** • E - Spike

**F** • F - Tree Strap

**G** • G - Pole Base

**I** • I - Tria M Pole



# Faro Square 150

## OPTIONAL ACCESSORIES

### Power supplies

DRIVERS

[LINK](#)

- [List of available drivers](#)

### Various Accessories

VARIOUS

203953


- 203953 - Safety wire rope



## Faro Square 150

### INSTALLATION DETAILS

#### Fixture

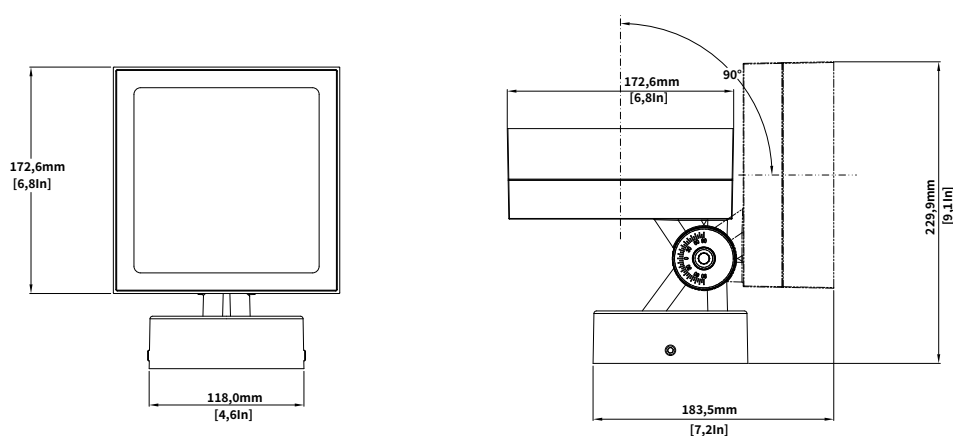

#### Adjustable tilt

Compliant with ANSI C136.31 standard for vibration conditions on bridges and overpasses. Designed to allow product tilt of 125°. The installation should be performed as per local codes and different applications but the bracket allows adjustment in terms of position on the product and with slots that are designed for 6mm bolt.




## Faro Square 150

### INTERNAL LIGHT CONTROL


#### Microlouvre

Provides low glare control with 30% less lumen output than product without louvres. Best for use where pedestrians are at least 6m (20ft) from the light source.




#### Hex louvre

Provides low glare control with 45% less lumen output than product without louvres. Best for use when there is no need for segment beam cut off such as in half moon.




#### Discrete sight

Provides low glare control with 60% less lumen output than product without louvres. Best for use in high traffic areas where pedestrians are at least 0,5m (1,64ft) away from the source.




#### Halfmoon

Provides glare control by reducing lumen output and implementing a light beam cut-off, resulting in a 50% reduction in stray light and minimized light dispersion in undesirable directions.



#### Honeymoon

Combines the benefits of Hex Louvre and Halfmoon, offering both reduced glare and controlled light dispersion for comprehensive glare management.






## Faro Square 150

### EXTERNAL LIGHT CONTROL

#### Snoot

External attachment providing enhanced glare control, effectively shielding the light source to reduce direct glare and prevent light spill in unwanted directions.

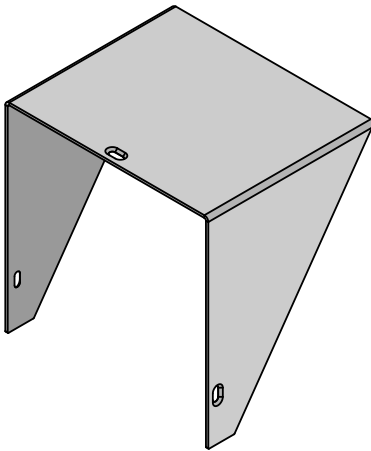




## Faro Square 150

### OPTIONAL ACCESSORIES


#### Power supply

A LED power supply, is an electrical device designed to control the power supplied to an LED or an array of LEDs. It plays a critical role in LED lighting systems as LEDs demand a specific type and level of electrical current or voltage for optimal operation. It's important to note whether a constant current or constant voltage LED power supply is required. The power supply should be installed in a dry and easily accessible area.



#### Safety wire rope

300mm long safety bond for added security during high-altitude installations

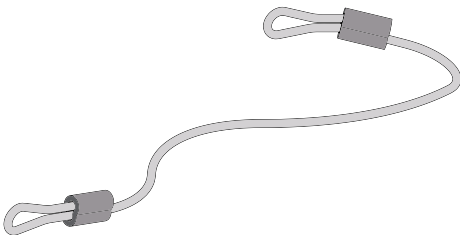






## Faro Square 150

### INSTALLATION OPTIONS


#### Base installation

Securely mounts the projector on a stable base, integrating wiring for a clean and permanent setup, ideal for environments requiring stable installations.




#### Spike installation

Ground spike-based setup allows easy insertion into the soil, perfect for flexible outdoor applications and landscape lighting.

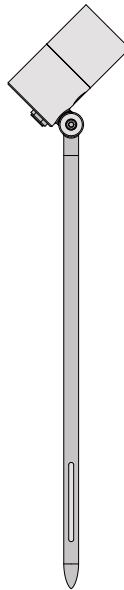


#### Tree strap installation

Adjustable metal strap secures the projector to a tree or branch, providing a versatile, non-invasive installation for natural settings.

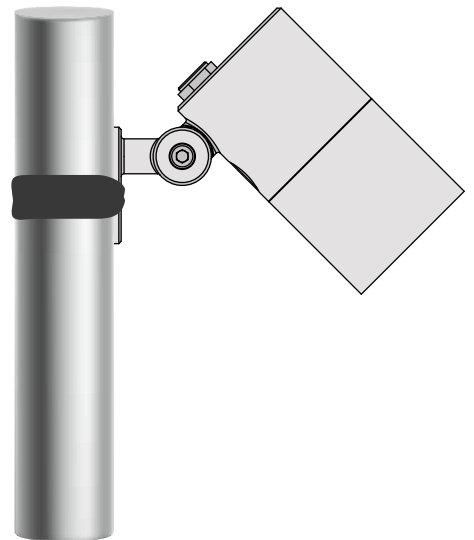


#### Pole base installation

Attaches the projector to a pole with an integrated wiring base, suitable for elevated, stable installations like street lighting.

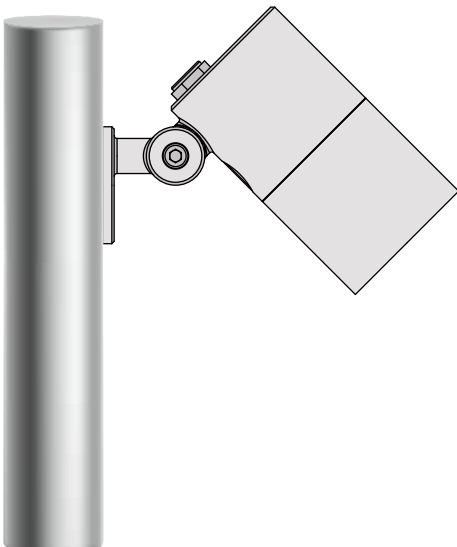

#### Tria pole installation (48VDC only)

Quick, click-based installation on a Tria pole with a pre-installed power cable, ideal for streamlined, low-voltage setups.

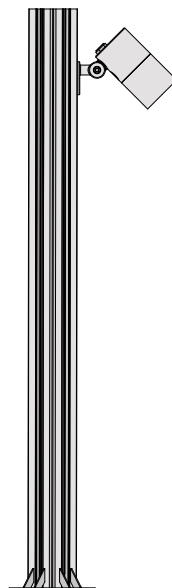





## Faro Square 150

### OPTICS


**Narrow Spot**  
Angle: 8°x8°








**Medium Spot**  
Angle: 15°x15°




**Narrow Flood**  
Angle: 30°x30°




**Medium Flood**  
Angle: 40°x40°

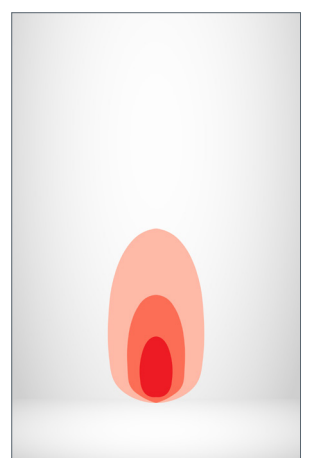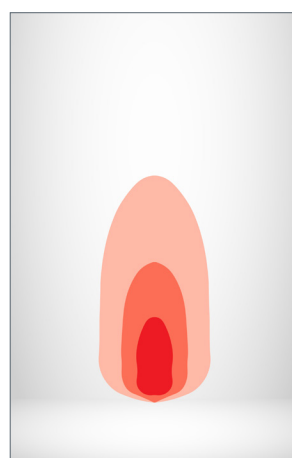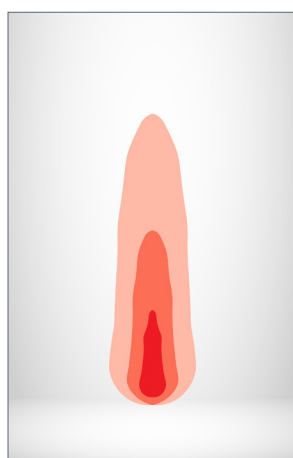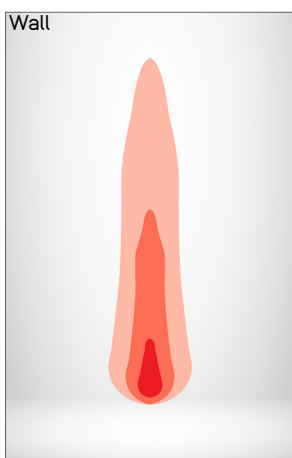


**Wide**  
Angle: 60°x60°








**Spot Asymmetric**  
Angle: 10°x20°



**Narrow Asymmetric**  
Angle: 10°x40°



**Medium Asymmetric**  
Angle: 10°x60°

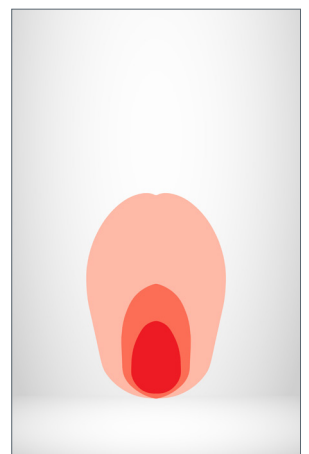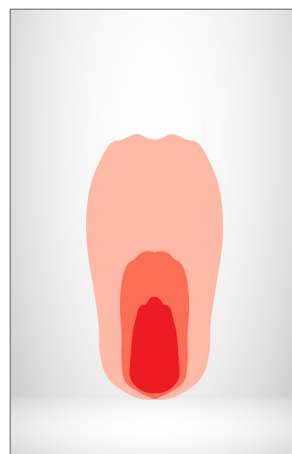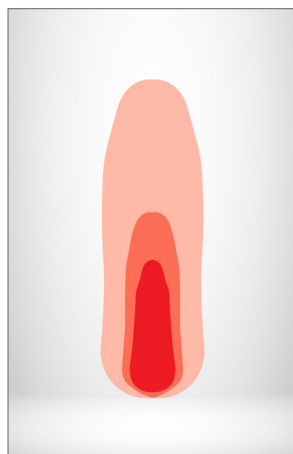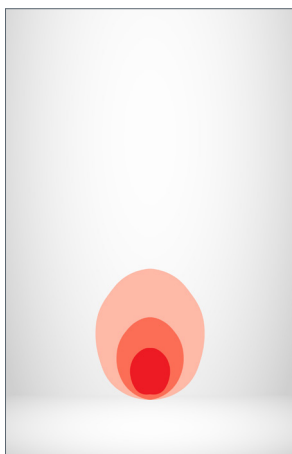

# Control

## ON/OFF SYSTEM TOPOLOGY

### Integrated systems:


- Flow Sense
- Heat Sense
- Split & Seal

### System components

- Wiring, protective devices and junction boxes leading up to feed cable at the start of the line are the responsibility of others
- Advised protective components:
  - Surge protector device
  - Inrush current limiter

### System topology

- In the system design, any of the following system topologies can be utilized: line wiring, star wiring, or tree wiring.

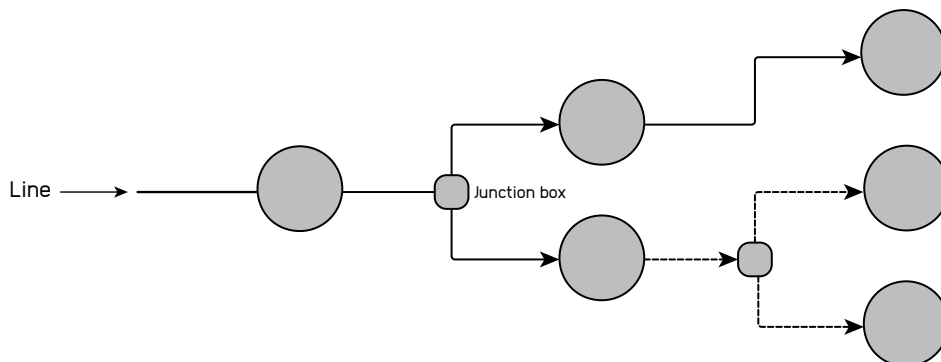

### Addressing & dimming notes

- ON/OFF system does not allow device addressing
- Dimming of the product not available in this system

### Segment length and limitations

- The maximum distance between the first and last fitting is limited to maximum voltage drop and fuse rating.
- Used only in single colour applications

### Fault tolerance

- If one product fails the rest of the system continues to work
- Class III wiring implemented in the fixture and voltage fluctuation filter implemented

# Control

## 0-10V SYSTEM TOPOLOGY

### Integrated systems:


- Flow Sense
- Heat Sense
- Split & Seal

### System components

- The 0-10V system, wiring, protective devices and junction boxes leading up to feed cable at the start of the line are the responsibility of others
- Advised protective components:
  - Surge protector device
  - Inrush current limiter

### System topology

- In the system design, any of the following system topologies can be utilized: line wiring, star wiring, or tree wiring.

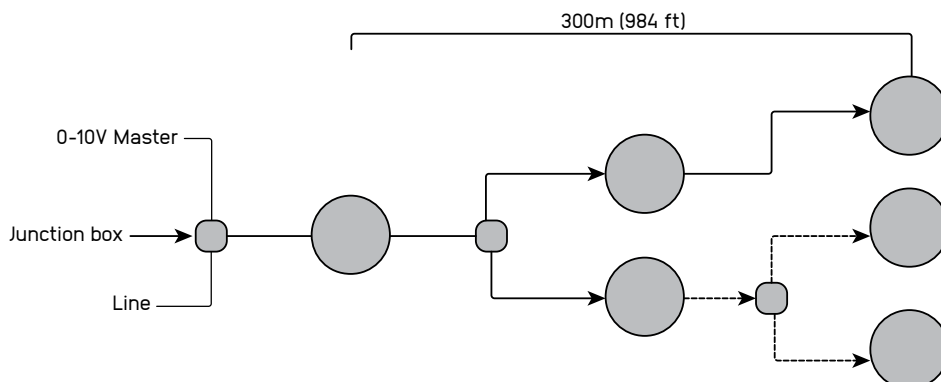

### Addressing & dimming notes

- 0-10V protocol does not allow addressing devices individually
- Logarithmic and linear dimming options available. The product is initially equipped with logarithmic dimming settings and it is suggested for the controllers to be linear in order to get the dimming that is most preferred in most cases due to the dimming curve perceived by human eye
- 0%-100% dimming range
- The product is initially set up as a source instead of as a sink type
- The product could also be set up as a sink type but this should be noted to sales representative

### Segment length and limitations

- The maximum distance between two fittings is 30 meters, and the maximum distance between the first and last fitting is 300 meters.
- Used in single colour applications

### Fault tolerance

- If the product is source type and in the case the control line doesn't have power the light fitting will turn at 100%. in the opposite case where the light is sink type, light will not work.
- If one product fails the rest of the system continues to work
- Class III wiring implemented in the fixture and voltage fluctuation filter implemented

# Control

## DALI SYSTEM TOPOLOGY

### Integrated systems:


- Flow Sense
- Heat Sense
- Split & Seal

### System components

- The DALI system, wiring, protective devices and junction boxes leading up to feed cable at the start of the line are the responsibility of others
- Advised protective components:
  - Surge protector device
  - Inrush current limiter

### System topology

- In the system design, any of the following system topologies can be utilized: line wiring, star wiring, or tree wiring.

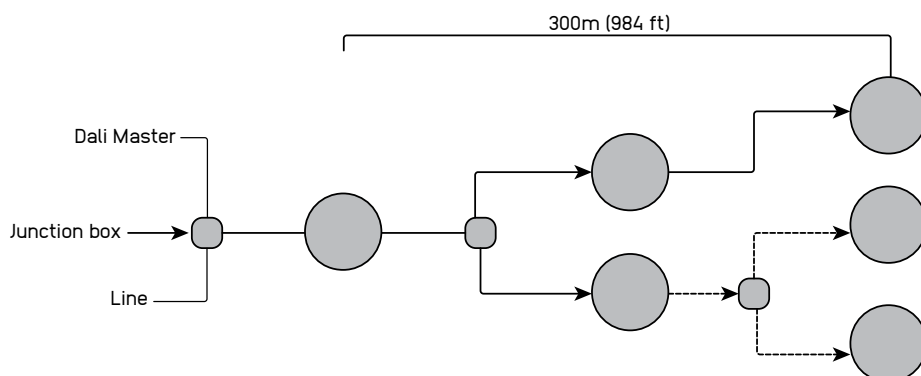

### Addressing & dimming notes

- DALI protocol allows addressing devices individually
- Addressing methods include a short address for individual devices, group addresses for up to 16 groups, and a broadcast address that targets everything on the line.
- Logarithmic and linear dimming options available. the product is initially equipped with logarithmic dimming settings, while you can easily switch to logarithmic dimming using a configuration device.
- 0%-100% dimming range

### Segment length and limitations

- A DALI master has the capacity to manage a line containing a maximum of 64 devices. Each device can be allocated to 16 unique groups and 16 individual scenes.
- The maximum distance between two fittings is 30 meters [98ft] , and the maximum distance between the first and last fitting is 300m [984ft].
- Used in single colour and tunable white applications

### Fault tolerance

- Due to its relatively slow operating speed and high bus voltage, the DALI system exhibits significant reliability in the presence of electrical interference, making shielding unnecessary
- If one product fails the rest of the system continues to work

# Control

## DMX SYSTEM TOPOLOGY

### Integrated systems:


- Flow Sense
- Heat Sense
- Split & Seal

### System components

- The DMX system, wiring, protective devices and junction boxes of the line are the responsibility of others
- Advised protective components:
  - Surge protector device
  - Inrush current limiter

### System topology

- In the system design, line wiring can only be used

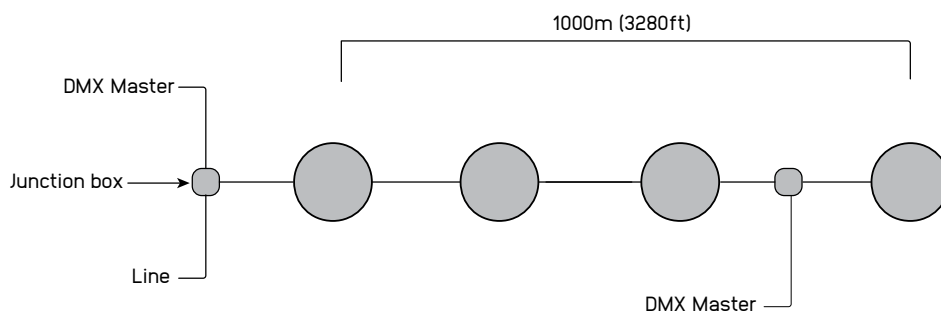

### Addressing & dimming notes

- DMX protocol allows addressing devices individually
- Addressing methods allow short address for individual devices
- Logharitmic and linear dimming options available. the product is initially equipped with logarithmic dimming settings, while you can easily switch to logarithmic dimming using a configuration device.
- 0%-100% dimming range

### Segment length and limitations

- A DMX universe has the capacity to manage a line containing a maximum of 512 addresses. Each Luminaire can be allocated to maximum 4 unique addresses.
- The maximum distance between two fittings is 30m (98ft), and the maximum distance between the first and last fitting is 1000 meters.
- Used in single colour, tunable white, and RGBW applications
- DMX addresses can be programmed in factory or on site. Consult your sales representative if addressing is to be done in factory

### Fault tolerance

- If one product fails the rest of the system continues to work