



Step Up Wide

Specification Sheet



UL STD 1598
IP67


LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Marker light effect
- Chasing light 100mm (3.9") increment
- UL STD 1598, IP67, Wet location, drive over rated 5000 kg (11000lb)

Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Stainless steel type 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=60500h
- Supplied with oil and water resistant 1m (3,3') feed cable as standard
- CRI: > 85
- 2 Step MacAdam

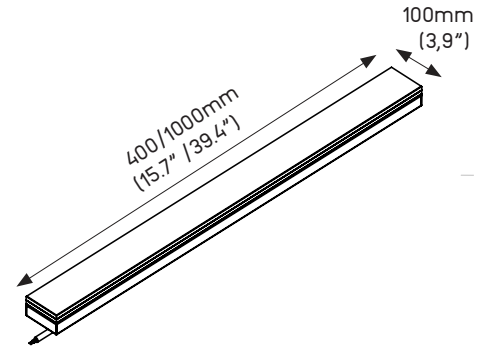

Safety

- Remote or double integrated power supply
- Low/Main voltage operation
- Recessed installation

Sustainability

- Recyclable material
- Amber light - Dark sky friendly

Installation housing

- SLW400 - 401mm (15,7")
- SLW1000 - 1001mm (39,4")

Accessories

- 200886 - Removal tool

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.



Step Up Wide

ORDERING INFORMATION

MODEL

SLW

LENGHT

400

- 400mm (15,7")

1000

- 1000mm (39,4")

POWER

L

- L - 10W/m, 3W/ft Amber, 2700K, 3000K, (900lm)

H

- H - 23W/m, 7,6W/ft Amber, 2700K, 3000K, (1700lm)
- L - 10W/m, 3W/ft RGBWA , RGBWA
- H - 23W/m, 7,6W/ft RGBWA , RGBWA

COLOR TEMP.

A

- A - Amber

30

- 30 - 3000K

RGBW

- RGBW (W 3000K)

RGBWA

- RGBW+A (Amber) (W 3000K)

OPTICS

LL

- LL = 120° even illumination

VOLTAGE

24

- 24 - 24VDC fixture voltage

230

- 230 - 230VAC

110


- 110 - 110 - 277VAC



Step Up Wide

INSTALLATION DETAILS

Installation housing - SLW400 / SLW1000

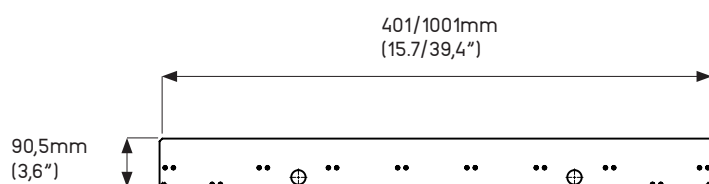

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.