



Step Up Deco

Specification Sheet



UL STD 1598
IP67

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Large interior lobby spaces
- Recessed floor installation
- Gravel, soil or concrete installation
- UL STD 1598, IP67, Wet location, drive over rated 1500 kg (3300lb)

Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Stainless steel type AISI 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=54400h
- Supplied with oil and water resistant feed cable with a length that matches the length of a fixture
- CRI: > 85
- 2 Step MacAdam

Safety

- Remote power supply
- Low voltage operation
- Recessed installation

Optimal fixture postioning

- Max. 50mm (2") between fixtures for continous light effect

Sustainability

- Recyclable material

Installation housing


- LIN324 - 324mm (12,8")
- LIN624 - 624mm (24,6")
- LIN1224 - 1224mm (48,2")

Accessories

- 200885 - Removal tool

Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

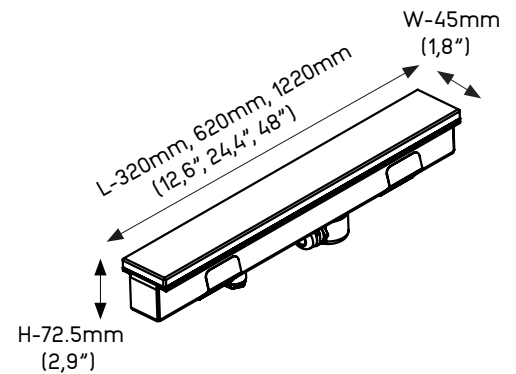

Click [here](#) to download fixure installation manual.
Click [here](#) to download housing installation manual.
Click [here](#) to download CAD file.
Click [here](#) to download IES-LTD data.



Step Up Deco

ORDERING INFORMATION

MODEL

FSD

LENGTH

- | | |
|----|-----------------|
| 12 | • 324mm (12.6") |
| 24 | • 624mm (24.4") |
| 48 | • 1224mm (48") |

POWER

- | | |
|---|---------------------------------------|
| H | • H - 12W/ft, 2700K - 3000K, 960lm/ft |
| | • H - 12W/ft, RGBW (W 3000K) |

COLOR TEMP.

- | | |
|----|--------------|
| 27 | • 27 - 2700K |
|----|--------------|

- | | |
|----|--------------|
| 30 | • 30 - 3000K |
|----|--------------|

- | | |
|------|------------------|
| RGBW | • RGBW (W 3000K) |
|------|------------------|

OPTICS

- | | |
|----|-------------------|
| SP | • SP - Spot - 13° |
|----|-------------------|

- | | |
|----|--------------------|
| FL | • FL - Flood - 31° |
|----|--------------------|

- | | |
|----|--------------------------|
| GR | • GR - Graze - 14° x 40° |
|----|--------------------------|

- | | |
|----|-------------------------|
| SX | • SX - Spot - 13° + hex |
|----|-------------------------|

- | | |
|----|--------------------------|
| FX | • FX - Flood - 31° + hex |
|----|--------------------------|

- | | |
|----|--------------------------------|
| GX | • GX - Graze - 14° x 40° + hex |
|----|--------------------------------|

VOLTAGE

- | | |
|----|-------------------------------|
| 24 | • 24 - 24 VDC fixture voltage |
|----|-------------------------------|

OPTIONS

- | | |
|---|---|
| 3 | • 3 - luminaire supplied with 3m (10') feed cable |
|---|---|

- | | |
|---|---|
| 6 | • 6 - luminaire supplied with 6m (20') feed cable |
|---|---|


- | | |
|---|---|
| 9 | • 9 - luminaire supplied with 9m (30') feed cable |
|---|---|



Step Up Deco

INSTALLATION DETAILS

Installation housing - LIN324 / LIN624 / LIN1224

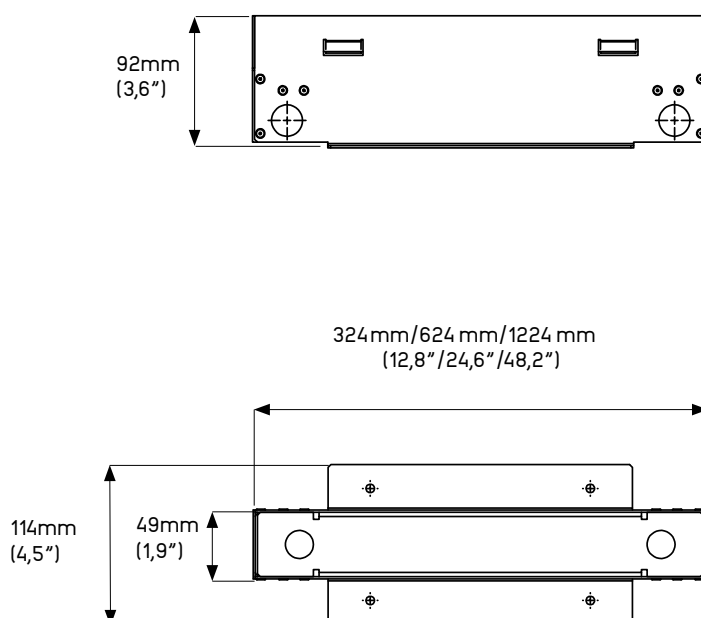

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.