



Ion Switch

Specification Sheet



UL STD 1598
IP66

LUMINAIRE FEATURES

Design and Application

- Architectural and landscape lighting
- Surface mount
- Anchor installation
- 4 apertures, 5 light effects
- Switch for angle adjustment
- UL STD 1598, IP66, Wet location

Performance

- Aluminum structure body
- Anodized and painted body
- Base for feed through connection
- Recessed lens
- On site head movement 360°
- Constant voltage 120-240 VAC
- Finish powder coat RAL9003/RAL7016/
RAL9005 structure
- IP55 junction box
- IK10
- Lifetime TM-21 @85C L90(9K)=60500h
- CRI: > 85
- 2 Step MacAdam

Sustainability


- Recyclable material
- Replaceable LED module

Accessories

- 201846 - Installation Anchor

Power supplies

- Integrated power supply
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

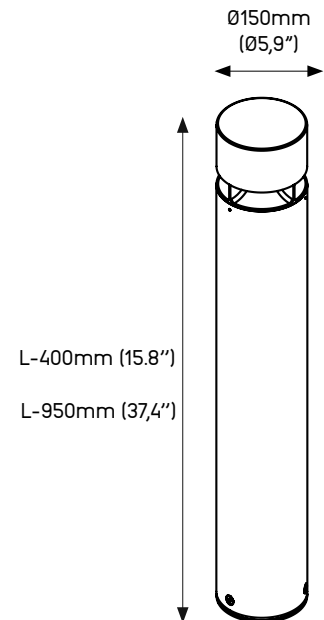

Click [here](#) to download fixture installation manual.

Click [here](#) to download CAD file.

Click [here](#) to download IES-LTD data.



Ion Switch

ORDERING INFORMATION

MODEL

FIN

HEIGHT

M

- M - 15,8" (400mm)

L

- L - 37,4" (950mm)

POWER

L

- L -23W, 2700K-4000K, 865lm (360 degrees)

COLOR TEMP.

27

- 27 - 2700K

30

- 30 - 3000K

40

- 40 - 4000K

OPTICS

QM

- QM - 0-360° - switch

FINISH

W

- W - RAL 9003 Structure (white)

AT

- AT - RAL 7016 Structure (grey antracite)

BK

- BK - RAL 9005 Structure (black)

OPTIONS

D

- D - DALI

V


- V - 0-10V





Ion Switch

INSTALLATION DETAILS

MANUAL ON SITE LIGHT INTENSITY/DISTRIBUTION SWITCH

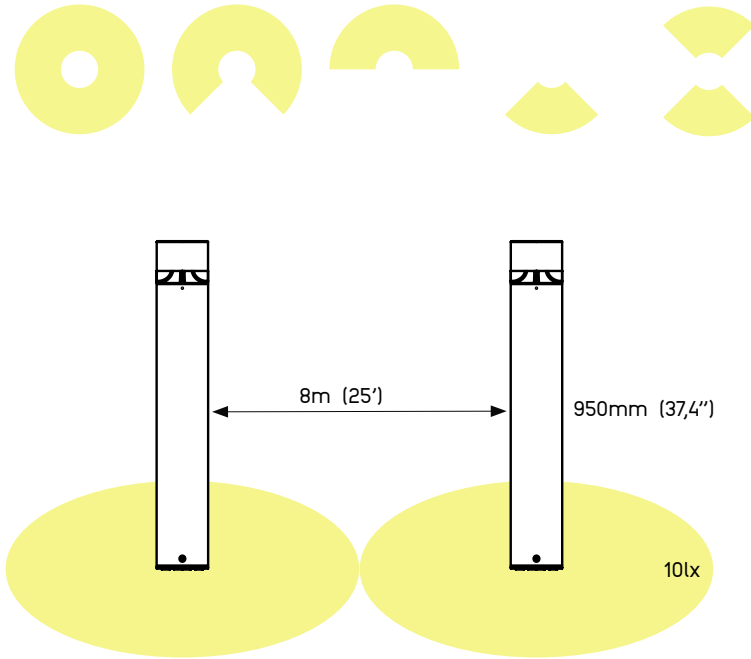

ON SITE HEAD MOVEMENT 360° WITH LOCK
Allows ON SITE manual head adjustment
for change of light distribution angle or
fine tuning.

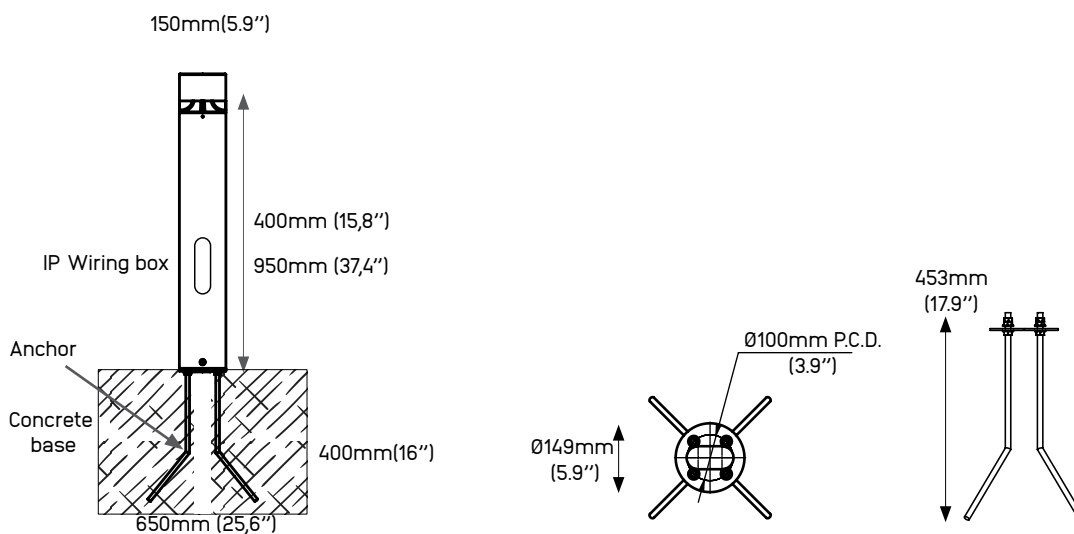

Note:
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.