



ARPOOL XS

INSTALLATION INSTRUCTIONS (HOUSING)

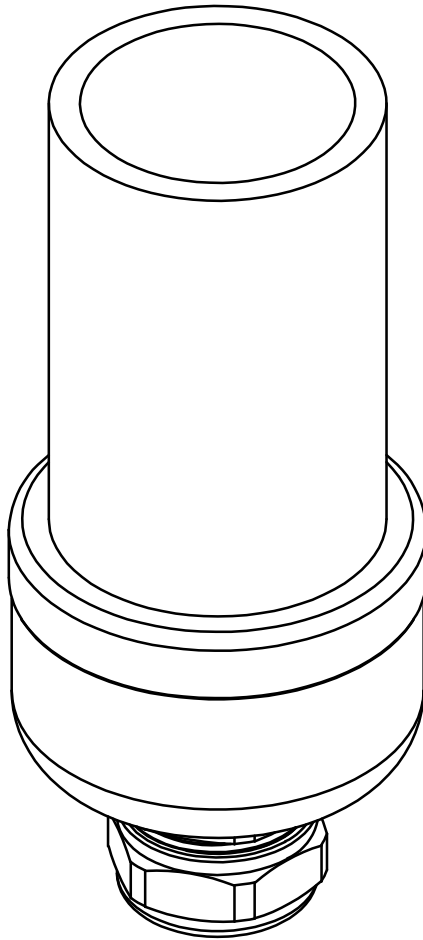

IP68

PP-R




ALL DIMENSIONS ARE GIVEN ACCORDING TO THE SI SYSTEM OF UNITS (MM, KG, °C), ADDITIONAL DIMENSIONS THAT ARE WRITTEN IN BRACKETS, ARE GIVEN ACCORDING TO THE U.S. MEASUREMENT SYSTEM (IN, LBS, °F)

GENERAL REMARKS ON SAFETY :

- READ ALL OF THESE INSTRUCTIONS BEFORE INSTALLATION.
- KEEP ALL OF THE INSTRUCTIONS FOR FUTURE REFERENCE.
- INSTALLATION IS TO BE PERFORMED BY A QUALIFIED CONTRACTOR.
- ALL INSTALLATIONS ARE TO CONFORM TO THE STANDARDS OF THE NATIONAL ELECTRICAL CODE AS WELL AS ALL LOCAL JURISDICTIONAL CODES AND REGULATIONS.
- THE MANUFACTURER ACCEPTS NO RESPONSIBILITY FOR DAMAGE TO PERSONS OR PROPERTY ARISING THROUGH IMPROPER USE OR INSTALLATION.
- HOUSINGS' SURFACES EXPOSED TO THE EFFECTS OF WATER (INCLUDING WATER CONTAINING CHLORINE) ARE MADE OUT OF PPR MATERIAL. PPR MATERIAL IS WELL-SUITED FOR USE IN POOLS DUE TO ITS CHEMICAL RESISTANCE AND DURABILITY.
- FOR WARRANTY CONDITIONS PLEASE CONSULT LOCAL SALES REPRESENTATIVE

HOUSING DIMENSIONS

CONCRETE POOL HOUSING

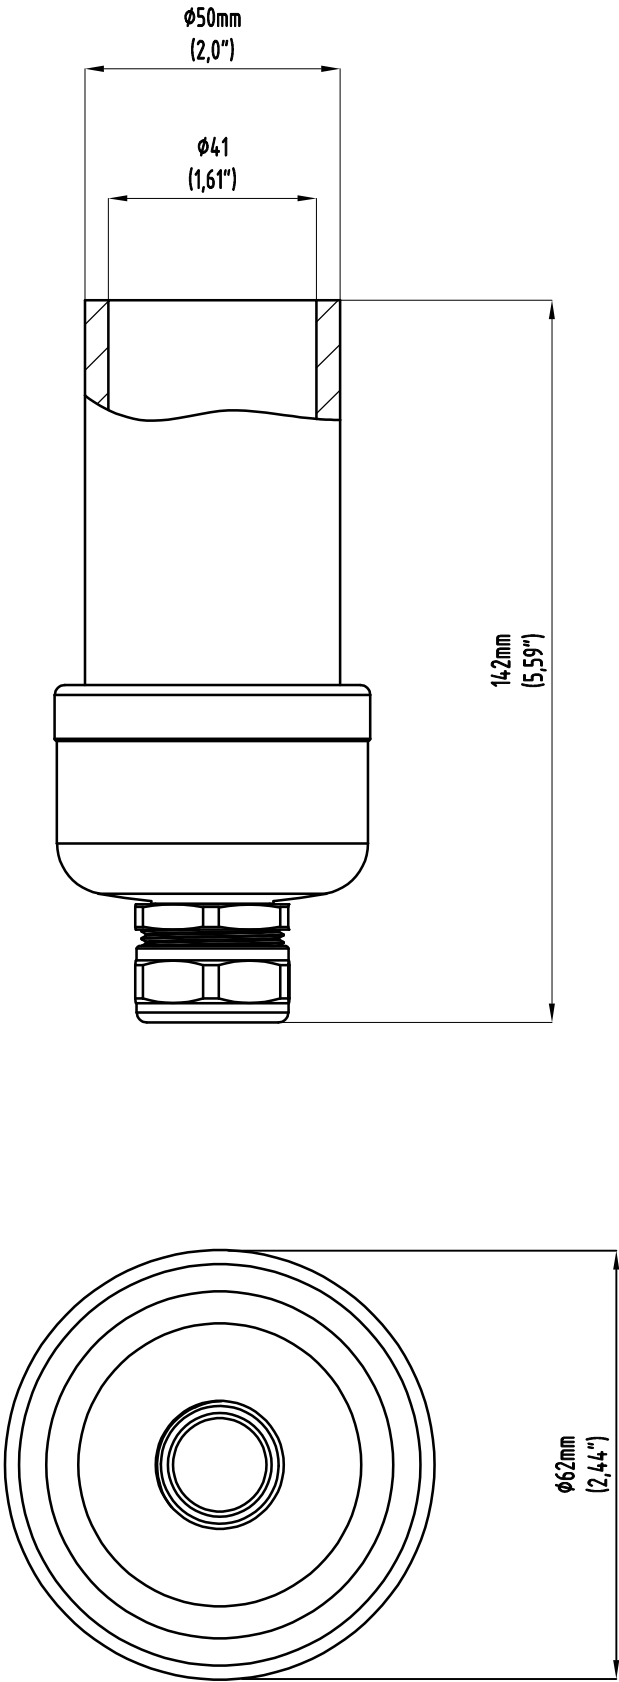



HOUSING INSTALLATION GUIDE

CONCRETE POOL HOUSING

1. ATTACH THE ARPOOL INSTALLATION HOUSING TO THE FORMWORK
2. ATTACH CABLE CONDUIT HOSE TO HOUSING USING LIQUID TIGHT ADAPTER, ENSURE IT IS TIGHTENED SECURELY.
(CABLE CONDUIT HOSE SUPPLIED BY MANUFACTURER).
3. POUR CONCRETE
4. PUT MORTAR AND TILES

IMPORTANT NOTE:

- BEFORE ATTACHING THE HOUSING (1), PROTECT THE HOUSING OPENING WITH TAPE, TO PREVENT EXCESS MATERIAL IN THE HOUSING
- THE MINIMUM BENDING RADIUS FOR THE CABLE CONDUIT HOSE IS 70 MM. DO NOT GO BELOW THIS LIMIT.

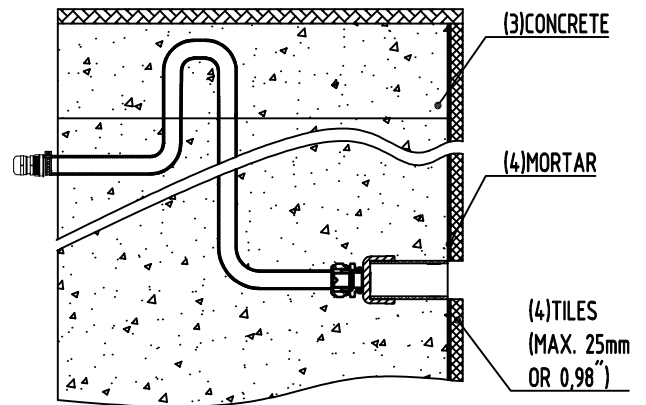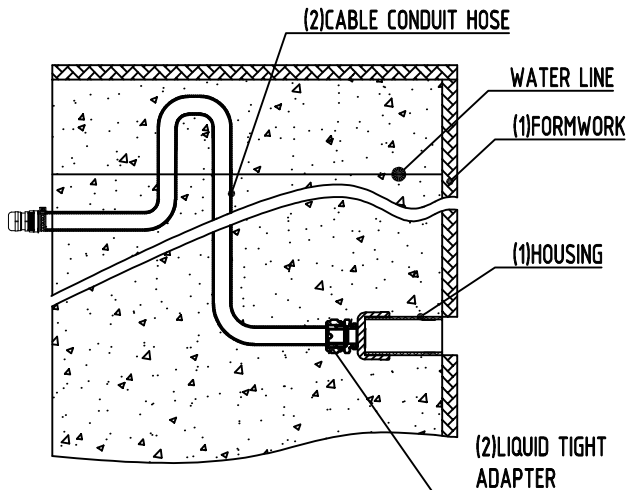

CABLE INSTALLATION GUIDE

IMPORTANT NOTE:

WHEN ROUTING THE CABLE CONDUIT HOSE, POSITION THE SECTION OF THE HOSE ABOVE THE WATERLINE TO PREVENT WATER DRAINAGE FROM THE POOL THROUGH THE HOSE

